




200E Indicator - 0.6" LED display. ABS NEMA 12 enclosures, 115 VAC, NTEP certified at 5000 divisions Class III, RS-232. Stainless steel swivel stand.



Interface Cable - 15' long with a 14 pin Centronics connector. 4 wire with braided shielding. 0.2" diameter cable, 24AWG stranded wire.

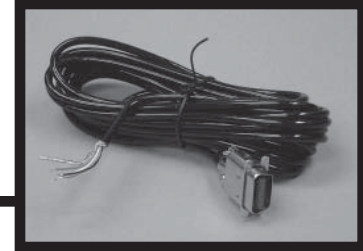


Leveling Feet - 4 quantity. Stainless steel construction with molded rubber insert. 1.75" diameter, 2.82" total length, 2" long 1/2-20 threads.



Junction Box - 4 channel signal trim, ABS NEMA 12 enclosure, mounting tabs on base of enclosure, sealing tabs on cover.



Load Cells - 4 quantity. Nickel-plated alloy steel, 3.0mV/V rated output, NTEP certified at 5000 divisions Class III, 20" cable length.

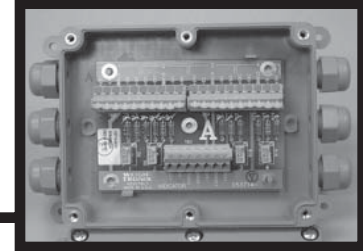

Summing Board - 4 channel signal trim, spring-loaded wire release levers, conformal coated, 4 corner balance pots.